MARATHON PRODUCTS

c\temp-LCD™ Data Logger

Our Single-use Temperature Logger with Real-Time LCD Display for Instant Acceptance or Quarantine Decisions.

The c\temp-LCD is the revolutionary, single-use, preprogrammed, electronic temperature data recorder specially designed for measuring temperatures during transport of perishable pharmaceuticals and food products.

FEATURES:

- *NIST-Traceable with Certificate of Compliance
- *IP66 rated **Waterproof**
- *Internal Thermistor: accurately records time and temperatures for user selectable readings in Celcius or Fahrenheit.
- *LCD Display shows:
 - -Current Temperature -Max and Min Temperatures
 - -Run Time -Alarm Status -Recording
- *Compact and Rugged at only 2.5"x1.3"x 0.35"
- *Internal Software Records:
 - -Start time -Sampling intervals -Special instructions
 - -Alarm values -Recording Status -Measurement Data
 - -Serial & Tracking Number -After the Fact Report Generation

*Visual Alarms: If the temperature reaches levels outside preprogrammed alarm limits, the LCD will display "ALARM" and if pre-programmed # of alarm occurence limit is reached, the LCD will display "QUARANTINE" for INSTANT "accept" or "reject" decisions!

*USB Interface: To download recorded information, simply plug the optional USB Cradle into the standard USB port of your PC.

Cloud Computing

Temperature Logger Management

TRACEABILITY, HACCP COMPLIANCE

Marathon's Temperature data logger customers can share data and access their temperature and RH files remotely, anywhere, at anytime via the Internet.

Our cloud-based software provides compliance with HACCP rules and regulations for all of your perishable shipments.

Distributed by:





Phone: 416-261-4865 www.scigiene.com

MARATHON

PRODUCTS, INC. Don't ship without us!

MaxiThermal Software Highlights: Easy-to-use software provides clear graphs. Report Summary & Statistics File Manager, Note Attachment, Zoom, Elapsed Time or Date/Time View, Recorded View, Celsius or Fahrenheit. Data can be exported to other Windows programs such as spreadsheets, word-processing or databases. Available for Windows 98, NT, 2000, ME, XP and Windows 7. An Enterprise Software version and 21 CFR Part 11 Compliant Software are available.

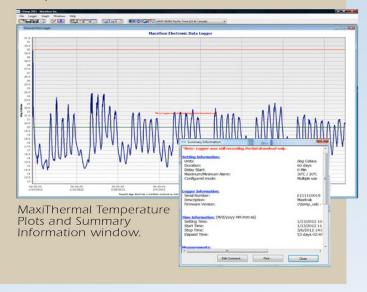

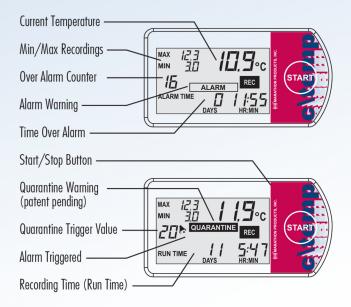

PRODUCT # DESCRIPTION

MA0286 C\TEMP-LCD Datalogger
MA0570 LCD Series USB Cradle
MA0540 MaxiThermal Software

TO PLACE AN ORDER, Call or Email Us Today:



Phone: 416-261-4865 Email: <u>quotes@scigiene.com</u> www.scigiene.com

c\temp-LCD Specifications

Memory EEPROM, Storage: 8k (7,680 data points)

Temperature Range: -35°C to $+50^{\circ}\text{C}$ (-31°F to +122°F)

Temperature Accuracy: $\pm 0.2^{\circ}\text{C}$ at 0° to 10°C, $\pm 1.0^{\circ}\text{C}$ at extremes

 $(\pm 0.4^{\circ}F$ at 32° to 50° F, $\pm 1.8^{\circ}F$ at extremes)

Measurement Intervals: Pre-programmed from 1 minute to hours depending

on model type (duration)
4 days = 0 min. 43 sec.
7 days = 1 min. 15 sec.
16 days = 2 min. 50 sec.
30 days = 5 min. 19 sec.
60 days = 10 min. 38 sec.
90 days = 15 min. 57 sec.
365 days = 1 hr. 4 min. 39 sec.

Temperature Sensor: NIST-traceable Precision SMT Thermistor

Indicators: Start/Stop and Alarm

High and low alarm limits: LCD display. ALARM set by temperature and time.

Computer Interface: USB Cradle

Internal Software Provides: Times, Start time, Interval, User description, Alarm values,

Recording status, Measurement data, Software version,

Serial number, Model type

Power Source: Lithium Battery (1 year operating, 3 year shelf life)

Size: Length Width Depth

6.4 cm (2.5 in.) 3.3 cm (1.3 in.) 0.9 cm (0.35 in.)

Weight: 56.7 g (2.0 oz.)

Options: MaxiThermal software (Product # MA0540)

USB cradle (Product # MA0570)

Serialization: This recorder is programmed at the factory with a unique

serial number for positive tracking.

Waterproof Enclosure: The product package is hermetically sealed to an IP66 rating.

Recyclable: c\temp-LCD recorders are designed for single use, and we encourage recycling. Please call Marathon Products for complete disposal or recycling instructions.

